




Submersible Sump Pump

HPSPCIV4000 / HPSPCIV4500



- Rugged cast iron construction maximizes pump life
- Innovative electronic vertical switch with 10' cord provides the most reliable water level control on current market
- Upper and lower sealed ball bearings for quiet performance and free of maintenance
- Volute top suction design filters debris and minimizes clogging
- Heavy-duty high efficiency PSC oil-filled motor with thermal overload protection
- 1-1/2" or 1-1/4" (with adaptor) NPT discharge and durable cast iron base for easy installation without any plumbing changes

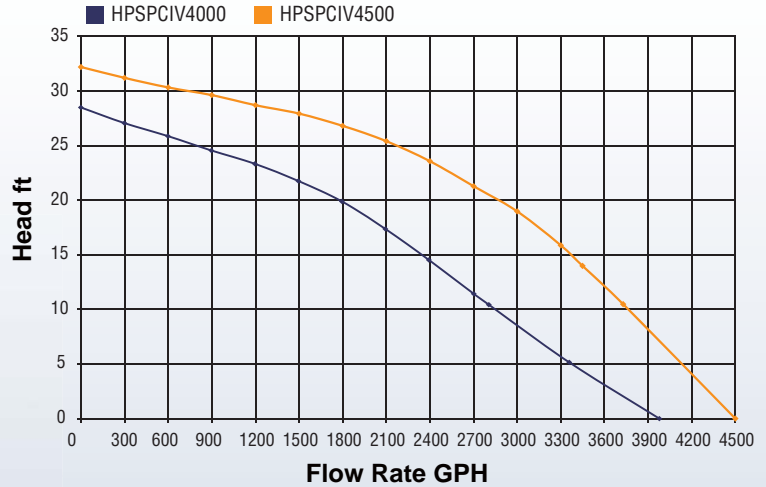

PERFORMANCE								
Model	HP	GPH of Water @ Total Feet (Meters) of Lift					Maximum	
		5 ft (1.5 m)	10 ft (3 m)	15 ft (4.6 m)	20 ft (6.1 m)	25 ft (7.6 m)	28 ft. (8.5 m)	32 ft. (9.8 m)
HPSPCIV4000	1/3	3360	2850	2340	1800	780	0	
HPSPCIV4500	1/2	4020	3780	3360	2880	1860		0

PRODUCT CAPABILITIES

Capacities:	HPSPCIV4000		HPSPCIV4500	
	4000 GPH	15152 LPH	4500 GPH	17045 LPH
Shut-Off Head:	28 ft.	8.5 m	32 ft.	9.8 m
Operation:	on off	8.5 in. 3.0 in	21.7 cm 7.7 cm	8.5 in. 3.0 in 7.7 cm
Solids Handling:	3/8 in.	9.5 mm	3/8 in.	9.5 mm
Liquids Handling:	drain water			
Continuous Liquid Temp.:	32~77°F	0~25°C	32~77°F	0~25°C
Motor Electrical Data:	1/3HP, 4.8A; 115V; 60Hz, PSC Motor, 3450 RPM		1/2HP, 5.6A; 115V; 60Hz, PSC Motor, 3450 RPM	
Shaft Seal:	dual lip shaft seal			
Housing:	cast iron			
Power Cord:	10 ft., SJTW, 18AWG/3C			
Innovative electronic vertical float switch:	10 ft., SJTW, 16AWG/2C			
Discharge, FNPT:	1-1/2" or 1-1/4" (with adaptor) NPT			
Min. Sump Diameter:	10 in.			

Hidropoint, LLC.
 9623 W. Hunt Club Dr
 Mequon, WI 53097
 Tel: (262)299-5188
 Fax: (262)247-0096
 E-Mail: services@hidropoint.com
 Web: <http://www.hidropoint.com>

