




Stainless Steel Submersible Sump Pump

HPSPSST3600



- 1/2HP, Single phase 115V/60Hz, 3450RPM
- High-efficiency PSC motor with thermal overload protection
- Self-lubricating ball-bearings
- Double lips shaft seals
- Solids handling up to 3/8 inches
- Stainless steel construction, superior corrosion resistance for heavy-duty applications
- Piggyback-style tethered float switch allows for automatic and manual operation
- Water cooling, oil free motor also allows for waterfall or fountain applications

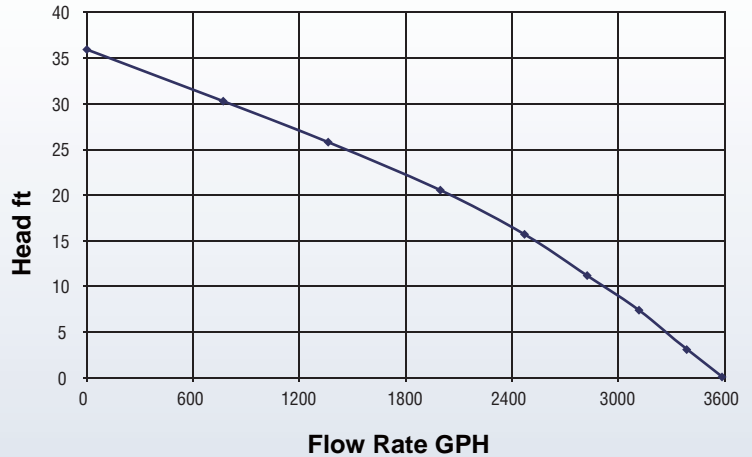

PERFORMANCE							
Model	HP	GPH of Water @ Total Feet (Meters) of Lift					Maximum
		5 ft (1.5 m)	10 ft (3 m)	15 ft (4.6 m)	20 ft (6.1 m)	30 ft (9.15 m)	36 ft. (11 m)
HPSPSST3600	1/2	3300	2880	2520	1980	780	0

PRODUCT CAPABILITES

Capacities:	3600 GPH	13627 LPH
Shut-Off Head:	36 ft.	11 m
Operation:	on off	38 cm 18 cm
Solids Handling:	3/8 in.	9.5 mm
Liquids Handling:	drain water	
Continuous Liquid Temp.:	32~77°F	0~25°C
Motor Electrical Data:	1/2HP, 6.0A; 115V; 60Hz, PSC Motor, 3450 RPM	
Shaft Seal:	dual lip shaft seal	
Housing:	stainless steel	
Power Cord:	10 ft., SJTW, 18AWG/3C	
Piggyback-style Tethered Float Switch:	10 ft., SJOW, 16AWG/2C	
Discharge, MNPT:	1-1/4 in.	
Min. Sump Diameter:	14 in.	



Hidropoint, LLC.
 9623 W. Hunt Club Dr
 Mequon, WI 53097
 Tel: (262)299-5188
 Fax: (262)247-0096
 E-Mail: services@hidropoint.com
 Web: <http://www.hidropoint.com>