




Submersible Sump Pump

HPSPSSV4500



- Stainless steel pump housing, rugged casting iron volute and seal plate maximizes pump life
- Innovative vertical switch with 10' cord provides the most reliable water level control on current market
- Upper and lower sealed roller ball bearings for quiet performance
- Volute top suction design filters debris and minimizes clogging
- Heavy-duty high efficiency permanent split capacitor motor with thermal overload protection
- Designed for minimum 10" diameter sump basin
- 1-1/2"NPT discharge and durable casting iron base for easy installation without any plumbing changes

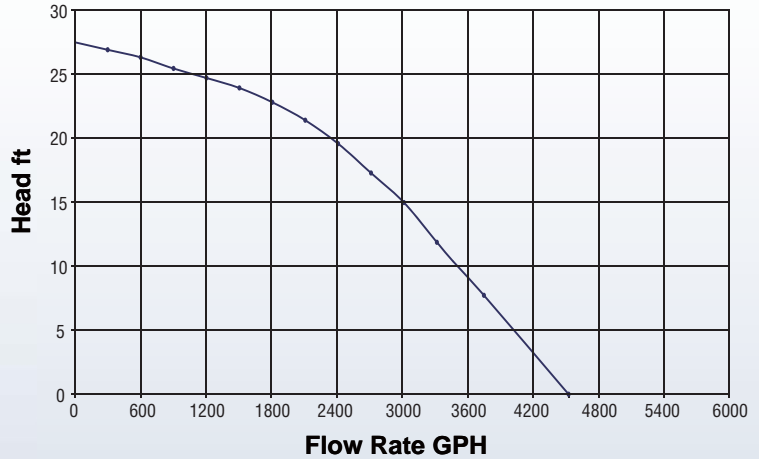

PERFORMANCE							
Model	HP	GPH of Water @ Total Feet (Meters) of Lift					Maximum
		5 ft (1.5 m)	10 ft (3 m)	15 ft (4.6 m)	20 ft (6.1 m)	25 ft (7.6 m)	
HPSPSSV4500	1/2	3960	3480	3000	2280	1050	0

PRODUCT CAPABILITES

Capacities:	4500 GPH	17045 LPH
Shut-Off Head:	28 ft.	8.5 m
Operation:	on off	20.5 cm 9.5 cm
Solids Handling:	3/8 in.	9.5 mm
Liquids Handling:	drain water	
Continuous Liquid Temp.:	32~77°F	0~25°C
Motor Electrical Data:	1/2HP, 7A; 115V; 60Hz, 3450 RPM	
Shaft Seal:	dual lip shaft seal	
Housing:	stainless steel	
Power Cord:	10 ft., SJTW, 18AWG/3C	
Innovative electronic vertical float switch:	10 ft., SJTW, 16AWG/3C	
Discharge, FNPT:	1-1/2" NPT	
Min. Sump Diameter:	10 in.	



Hidropoint, LLC.
 9623 W. Hunt Club Dr
 Mequon, WI 53097
 Tel: (262)299-5188
 Fax: (262)247-0096
 E-Mail: services@hidropoint.com
 Web: <http://www.hidropoint.com>