


Submersible Sewage Pump

HPSWCIT7000



- Rugged cast iron construction with corrosion resistant powder coated epoxy finish maximizes pump life
- Non-clogging vortex impeller design handling 2" solids
- High efficiency PSC motor with automatic reset thermal overload protection
- Ball bearings, oil filled, graphite and ceramic mechanical sealed motor for quiet operation and long life
- Stainless steel shaft, screws, bolts, and lift handle
- Replaceable piggyback tethered float switch for automatic and manual operations
- 2" female NPT discharge with 10ft power cord for easy installation
- Completely submersible, 6/10HP, maximum capacity up to 7000GPH

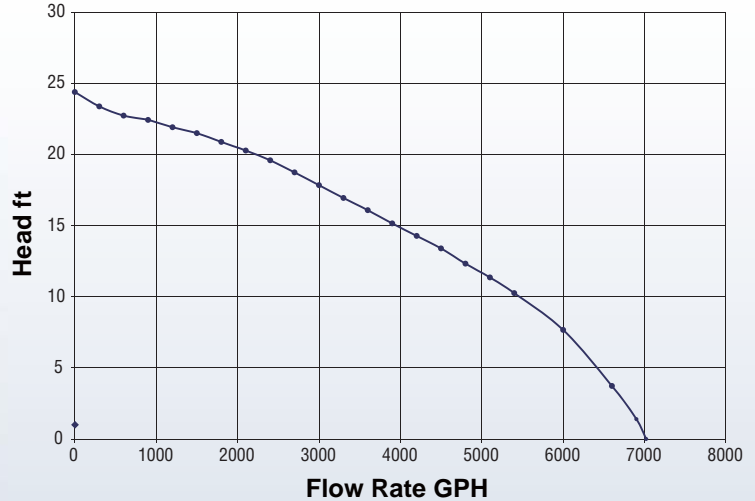

PERFORMANCE						
Model	HP	GPH of Water @ Total Feet (Meters) of Lift				Maximum
		5 ft (1.5 m)	10 ft (3 m)	15 ft (4.6 m)	20 ft (6.1 m)	24 ft. (7.3 m)
HPSWCIT7000	6/10	6500	5500	4000	2150	0

PRODUCT CAPABILITIES

Capacities:	7000 GPH	26498 LPH
Shut-Off Head:	24 ft.	7.3 m
Operation:	on off	14.8 in. 6.7 in.
Solids Handling:	2 in.	50.8 mm
Liquids Handling:	drain water	
Continuous Liquid Temp.:	32~131°F	0~55°C
Motor Electrical Data:	6/10HP, 7.4A; 115V; 60Hz, PSC Motor, 3450 RPM	
Shaft Seal:	dual lip shaft seal	
Housing:	cast iron	
Power Cord:	10 ft., SJTW, 18AWG/3C	
Piggyback-style tethered float switch:	10 ft., SJOW, 16AWG/2C	
Discharge, FNPT:	2 in.	
Min. Sump Diameter:	18 in.	

