


Submersible Sewage Pump

HPSWCIT9000



- Rugged casting iron construction with corrosion resistant powder coated epoxy finish maximizes pump life
- Non-clogging vortex impeller design handling 2" solids
- High efficiency permanent split capacitor motor with automatic reset thermal overload protection
- Ball bearings, oil filled, graphite and ceramic mechanical sealed motor for quiet operation and long life
- Stainless steel shaft, screws, bolts, and lift handle
- Replaceable piggyback tethered float switch for automatic and manual operations
- 2" NPT discharge with 10ft power cord for easy installation
- Completely submersible, 3/4HP, maximum capacity up to 9000GPH

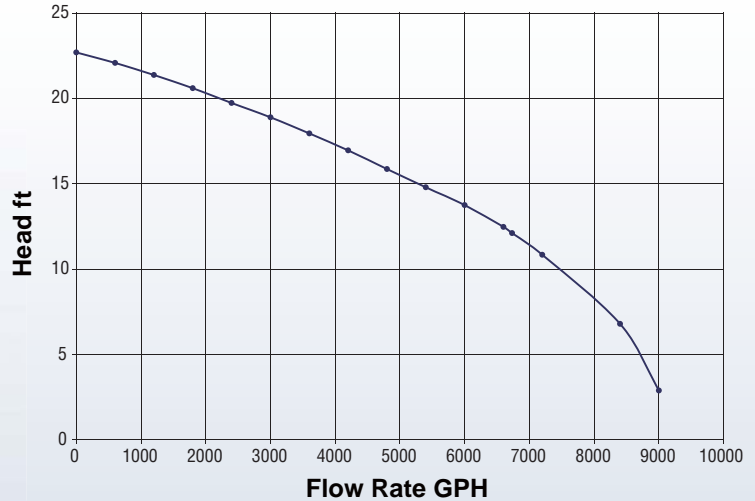

PERFORMANCE						
Model	HP	GPH of Water @ Total Feet (Meters) of Lift				Maximum
		5 ft (1.5 m)	10 ft (3 m)	15 ft (4.6 m)	20 ft (6.1 m)	23 ft. (7 m)
HPSWCIT9000	3/4	8800	7500	5200	2150	0

PRODUCT CAPABILITES

Capacities:	9000 GPH	34091 LPH
Shut-Off Head:	23 ft.	7 m
Operation:	on	18.1 in.
	off	9.3 in.
Solids Handling:	2 in.	50.8 mm
Liquids Handling:	drain water	
Continuous Liquid Temp.:	32-131°F	0-55°C
Motor Electrical Data:	3/4HP, 9.1A; 115V; 60Hz, 1725 RPM	
Shaft Seal:	meachnical seal	
Housing:	cast iron	
Power Cord:	10 ft., SJTW, 16AWG/3C	
Piggyback-style tethered float switch:	10 ft., SJOW, 16AWG/2C	
Discharge, FNPT:	2 in.	
Min. Sump Diameter:	18 in.	

