




# Non-submersible Water Transfer Utility Pump

## HPUTP390



- Patented design, flexible-impeller, water transfer utility pump
- Angled inlet and outlet design keeps water lubricating the impeller and significantly increases impeller life
- Clear see-through suction hose allows easy monitoring of pump dry-run
- No need for start-up vegetable oil lubrication. User friendly
- Patented impeller material composition. Impeller runs 3 times longer than current water transfer pumps on the market
- Brass pump body insert with reinforced high strength plastic pump housing, stainless steel motor shaft and pump cover, corrosion free
- Self-priming up to 9 feet (initially wetted impeller)
- Water transfer up to 390 gallons per hour, maximum lift up to 55 feet
- Removes water down to 1/8" with suction strainer
- Applications include removing water from flooded basements, waterbeds, washing machines, blocked sinks, water heaters and tanks
- 3/4" garden hose thread connection for easy installation
- Kit includes: 6 feet suction hose, suction strainer, replacement impellers and brushes

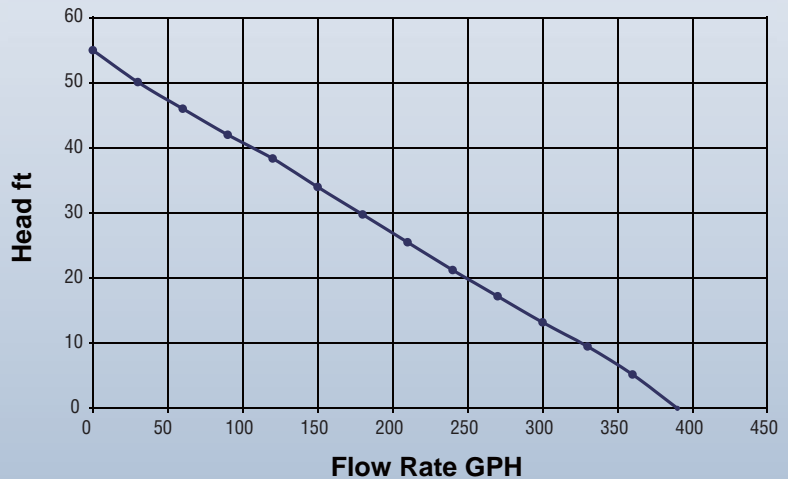

### PERFORMANCE

Model	HP	GPH of Water @ Total Feet (Meters) of Lift						Maximum
		5' (1.5 m)	10' (3 m)	20' (6.1 m)	30' (9.2 m)	40' (12.2 m)	50' (15.2 m)	55' (16.8 m)
HPUTP390	1/10	370	330	250	180	110	30	0



Hidropoint, LLC.  
 9623 W. Hunt Club Dr  
 Mequon, WI 53097  
 Tel: (262)299-5188  
 Fax: (262)247-0096  
 E-Mail: [services@hidropoint.com](mailto:services@hidropoint.com)  
 Web: <http://www.hidropoint.com>